



## IPS-22X / 35X Speed Dome Camera with 22x and 35x Optical Zoom


### OVERVIEW

The IPS-22X35X is designed for high risk applications can be panned, tilted and zoomed in seconds to the view you require. It offers super high resolution images and incorporates a mechanical IR filter which prevents focus shift when in IR mode and can be controlled by Pelco D or P compatible DVRs and Camera Controllers. It is supplied with an external housing as standard, however a variety of brackets and housings for internal or external mounting are available.


### FEATURES

- 22x / 35x optical zoom, 16x digital zoom
- Day & Night (option : IR-Cut filter Removable, ICR)
- 360° Continuous Pan
- On Screen Display (OSD) set-up menu
- 128 Preset Points Remote Control via RS-485 (control keyboard)
- IP66 for outdoor, built-in Heater & Fan
- Wall / Pendant / Corner / Goose-Neck mount


### DRAWINGS

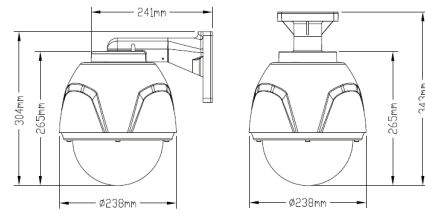

### OPTIONAL BRACKETS



### OPTIONAL KEYBOARD



The advanced controller features a speed sensitive joystick and will allow you to pan / tilt / zoom the camera.

Model	IPS-22ZI	IPS-35ZDNI	IPS-22ZDN	IPS-35ZDN
<b>Image Sensor</b>	1/4" Sony Super HAD CCD	1/4" Sony Ex-view CCD	1/4" Sony Ex-view CCD	
<b>Resolution (TVL)</b>	480	520 / 600	520 / 600	
<b>Optical Zoom</b>	22x (3.9 ~ 85.8mm)	35x (3.6 ~ 126mm)	22x (3.9 ~ 85.8mm)	35x (3.6 ~ 126mm)
<b>Min. Illumination</b>	0.1 Lux	0.1 ~ 0.01 Lux	(Color) 0.1 ~ 0.01Lux (B/W)	
<b>Day and Night (ICR)</b>	-----	Yes (True D/N)	Yes (True D/N)	Yes (True D/N)
<b>IP Rating</b>	IP66 (Outdoor)			
<b>Alarm / Relay</b>	6 / 1			
<b>Pan Speed</b>	Manual: 1°~150° / sec , Auto: 1°~300° / sec			
<b>Tilt Speed</b>	Manual: 1°~100° / sec, Auto: 1°~200° / sec			
<b>Presets Point</b>	128 Preset Points			
<b>OSD Menu</b>	Set-up Menu			
<b>Protocol</b>	Built-in Pelco D/P			
<b>Communication</b>	RS-485			
<b>Power Supply</b>	DC12V±10% (option: AC24V)			